
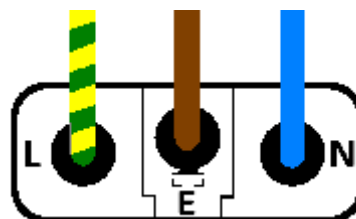


# Wiring guide: Promatic Trap Control boxes


**Warning: Disconnect Battery (or Transformer) before working on trap wiring !**

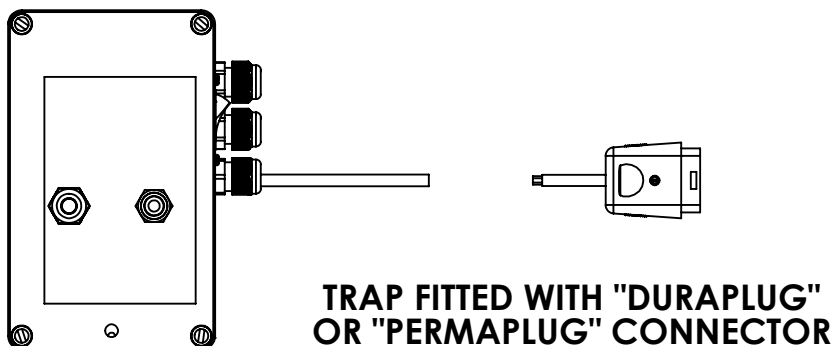

Wiring side of socket

Pin L - Green/Yellow  
Pin E - Brown  
Pin N - Blue

Note: Pin E may be marked  $\perp$

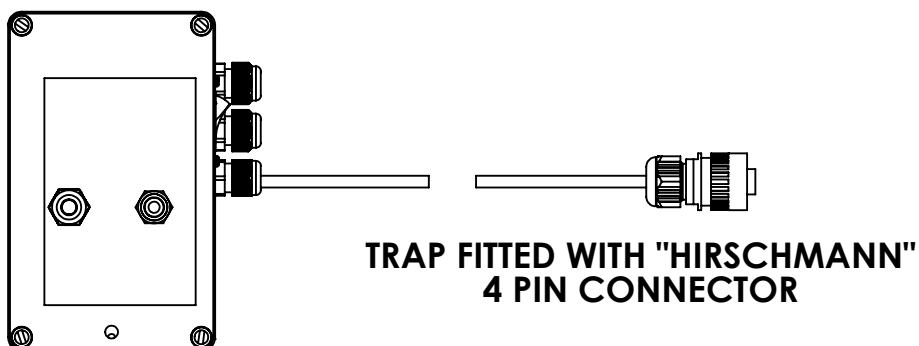


Wiring side of socket

Pin 1 - Brown  
Pin 2 - Green/Yellow  
Pin 3 - Blue  
Pin 4 - Not used

Note: Pin 4 marked  $\perp$

Assemble socket components as shown, use the rubber insert with the smaller centre hole (discard the other one)  
After wiring fit the front section to the body and screw together firmly before tightening the rear gland nut.

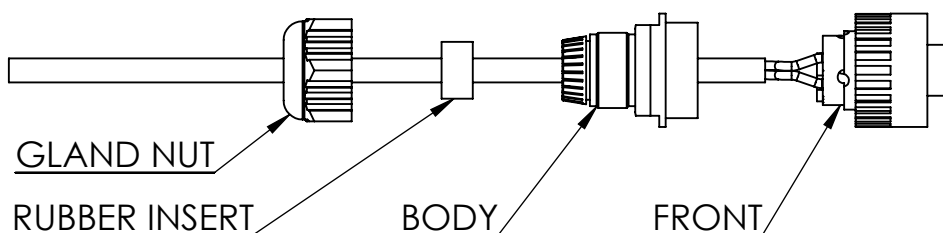

**Promatic International Ltd.**  
Hooton Road  
Hooton  
South Wirral  
CH66 7PA  
[www.promatic.co.uk](http://www.promatic.co.uk)  
Helpline: 44 (0)151 327 2220

**Promatic Inc.**  
801, Mid America Drive,  
Plattsburg,  
MO 64477  
USA  
Website: [www.promatic.biz](http://www.promatic.biz)  
Helpline: 1 888 767 2529 (Toll free)

